





OneConnect™ OCe11102

OneConnect UCNA Product Family

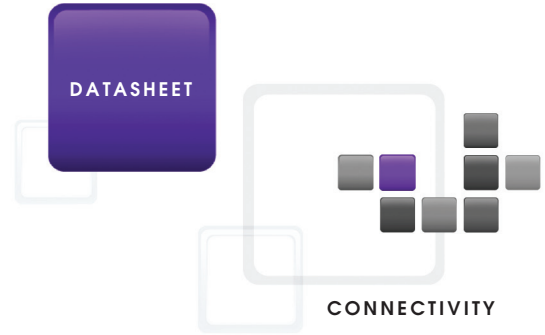

CONVERGENCE
OF NETWORKING
AND STORAGE
CONNECTIVITY



Emulex OneConnect Universal CNA Platform

The Emulex OneConnect™ OCe11102 Universal Converged Network Adapter (UCNA) platform is a third-generation, high-performance family of dual-port 10 Gigabit Ethernet adapters that support network and storage I/O.

10 Gigabit Ethernet

All OCe11102 adapters provide 10 Gigabit Ethernet (10GbE) connectivity with industry leading performance and support for advanced virtualization features that include VMware NetQueue and Microsoft Virtual Machine Queue.

Fibre Channel over Ethernet

OneConnect UCNAs support Fibre Channel over Ethernet (FCoE), seamlessly converging Fibre Channel and Ethernet while leveraging mature Fibre Channel management tools and processes. Based on IEEE Data Center Bridging (DCB) standards, FCoE simplifies network management and significantly reduces total cost of ownership.

iSCSI

OneConnect is an optimum solution for iSCSI storage deployments. Using a hardware iSCSI adapter with full protocol offload provides better performance and simplified management when compared to software initiators and standard NICs. The OneConnect iSCSI solution can support DCB standards to insure a consistent stream of data between servers and storage arrays.

vEngine technology

Emulex vEngine technology allows data centers to take full advantage of virtualization capabilities of new multi-core servers. With protocol offloads for TCP, iSCSI and FCoE, critical CPU resources are dedicated to running VMs, not I/O overhead.

Universal Multi-Channel

OneConnect Universal Multi-Channel (UMC) allows multiple PCI functions to be created on each adapter port. Each NIC function is presented to the operating system or hypervisor as a physical port with a separate MAC address and user-assigned bandwidth. OneConnect Ethernet adapters present four NIC functions per port. OneConnect iSCSI and FCoE adapters present one iSCSI or FCoE function plus three NIC functions per port.

Key Features

One card, many servers

- Full TCP/IP, iSCSI and FCoE offloads
- Same firmware, drivers and management as OneConnect blade and LOM solutions

Superior performance

- Hardware accelerators for all protocols
- High performance with optimum CPU efficiency

Energy-efficient design

- Industry-leading performance per watt
- Complements data center “green” initiatives

Easy to deploy and manage with the OneCommand™ Manager application

- One management console, many protocol services
- Integrated management of UCNAs and HBAs

Key Benefits

Optimized for convergence

- One network infrastructure reduces CapEx
- One management console reduces OpEx
- Leverages existing IT investments

Optimized for server virtualization with vEngine™ technology

- More virtual machines (VMs) per server with full TCP, iSCSI and FCoE offloads
- VM-specific performance, quality of service (QoS) and management

Enterprise-ready

- Hardware parity, CRC, ECC and other advanced error checking
- Backed by field-proven Emulex reliability and support



OneConnect™



OneCommand™

OneConnect™ OCe11102

OneConnect UCNA Product Family



Enterprise-Ready and Simplified Management

Emulex OneConnect OCe11102 adapters meet the robust interoperability and reliability requirements of corporate data centers. The design leverages proven Emulex enterprise class drivers, firmware and hardware architectures, while delivering sophisticated capabilities required to manage multiple types of data flow concurrently with optimized performance.

To increase administration efficiency and business agility, OneConnect adapters feature OneCommand Manager, enabling centralized administration of Emulex OneConnect UCNAs and LightPulse® HBAs throughout the data center from a centralized management console.

The OneCommand Manager for VMware vCenter plug-in module provides the same capability for virtualized server deployments.

Feature	Description	OCe11102-N	OCe11102-I	OCe11102-F
Link speed	10Gb/s Ethernet	✓	✓	✓
Dual port	Two 10Gb/s Ports	✓	✓	✓
PCI Express base spec 2.0	PCIe Express 2.0 (x8, 5GT/s)	✓	✓	✓
MSI-X support	Message Signal Interrupt Extended	✓	✓	✓
Hardware environments	x86, x64 processor family, Itanium™ IA64 servers	✓	✓	✓
Common driver by OS	Windows	✓	✓	✓
	Linux	✓	✓	✓
	VMware	✓	✓	✓
	Solaris	✓	✓	✓
Firmware upgrade	Upgradeable features for installed base	✓	✓	✓
Common Management Interface (FDI)	Industry-standard interface across all operating system environments	✓	✓	✓
Universal Multi-Channel	Multiple PCIe functions for each physical port	✓	✓	✓
Ethernet	IPv4/IPv6 TCP, UDP checksum offload; Large Send Offload (LSO); Large Receive Offload; Receive Side Scaling (RSS); IPV4 TCP Chimney Offload	✓	✓	✓
	VLAN insertion and extraction	✓	✓	✓
	Jumbo frames up to 9000 Bytes	✓	✓	✓
	Preboot eXecution Environment (PXE) 2.0 network boot and installation support	✓	✓	✓
	Interrupt coalescing	✓	✓	✓
	Load balancing and failover support including adapter fault tolerance (AFT), switch fault tolerance (SFT), adaptive load balancing (ALB), teaming support and IEEE 802.3ad	✓	✓	✓
iSCSI	Full iSCSI offload		✓	✓
	iSCSI Data Center Bridging		✓	✓
	Int 13 Remote Boot		✓	✓
Fibre Channel over Ethernet	Full FCoE protocol offload			✓
	FCoE Data Center Bridging			✓
	Common driver for UCNAs and HBAs			✓
	64 N_Port ID Virtualization (NPIV) interfaces (total for adapter)			✓
	Support for FIP and FCoE Ether types			✓
	Fabric Provided MAC Addressing (FPMA) support			✓
	1024 concurrent port logins (RPIs) per port			✓
	1024 active exchanges (XRIs) per port			✓
Remote Boot from SAN			✓	
Boot code support	x86	✓	✓	✓
	UEFI	✓	✓	✓
End-to-end parity/CRC	Data protection	✓	✓	✓
Power voltage required	+3.3v DC	✓	✓	✓
	+12v DC	✓	✓	✓
Host PCI slot	Standard bracket (low profile bracket available); short, low-profile form factor card	✓	✓	✓
Media interface	Copper: SFP+ Direct Attached Twin-Ax Copper interface; standards compliant passive copper cables up to 5m and active copper cables up to 10m	✓	✓	✓
	Optics: 10GBASE-SR short wave lasers with LC type connector	✓	✓	✓
	Twisted Pair: 10GBASE-T with Cat 6 or Cat 6a cabling	✓	✓	✓



World Headquarters 3333 Susan Street, Costa Mesa, CA 92626 +1 714 662 5600
Wokingham, UK +44 (0) 118 977 2929 | **Munich, Germany** +49 (0) 89 97007 177
Paris, France +33 (0) 158 580 022 | **Beijing, China** +86 10 68499547
Tokyo, Japan +81 3 5325 3261 | **Bangalore, India** +91 80 40156789

www.emulex.com

Emulex Connects™ Servers, Storage and People
twitter.com/emulex [friendfeed.com/emulex](https://www.facebook.com/emulex) [bit.ly/emulexlinks](https://www.linkedin.com/company/emulex) [bit.ly/emulexfb](https://www.youtube.com/channel/UC...)

©2012 Emulex, Inc. All rights reserved. This document refers to various companies and products by their trade names. In most, if not all cases, their respective companies claim these designations as trademarks or registered trademarks. This information is provided for reference only. Although this information is believed to be accurate and reliable at the time of publication, Emulex assumes no responsibility for errors or omissions. Emulex reserves the right to make changes or corrections without notice. This report is the property of Emulex and may not be duplicated without permission from the Company.