



Datasheet: FCSAS2400 Fibre Channel to Serial Attached SCSI Bridge

Overview

The FCSAS2400 Fibre Channel to SAS Bridge is a high performance protocol bridge for connecting SAS enabled peripherals such as Disks, Tape Drives, Tape Libraries and Optical devices to Fibre Channel Storage Networks.

The FCSAS2400 is housed in an industry standard 1U 19" rack mount enclosure with integral power supplies and cooling. Connectivity to the Fibre Channel Network is via 2 auto-sensing 4Gb FC ports that can detect the network connection speed and to the SAS peripherals devices via the 4 3Gb SAS ports.

Managing and installing the FCSAS2400 could not be easier with its inbuilt GUI that is accessible via the Ethernet interface is intuitive to use and provides the user with on screen help where necessary.


Key Advantages

Performance The FCSAS2400 has many unique features to maximise performance and ensure your data is transferred to the peripheral devices in the shortest possible time. With its unique non-blocking data cache module and patent applied modular technology, the FCSAS2400 provides industry leading performance.

Ease of Use With every increasing pressure on IT staff, there is less time to spend on learning and managing new products and therefore, it is critical that new products are intuitive and easy to use. Bridgeworks works closely with its customers to ensure this is always the case.

Environmental The FCSAS2400 uses the latest power supply technologies with typical efficiencies of 95%, which minimise electrical power consumption and heat output.

Pedigree When you purchase a Bridgeworks' product you are backed up by over 25 years of experience in designing protocol bridges for the storage industry.

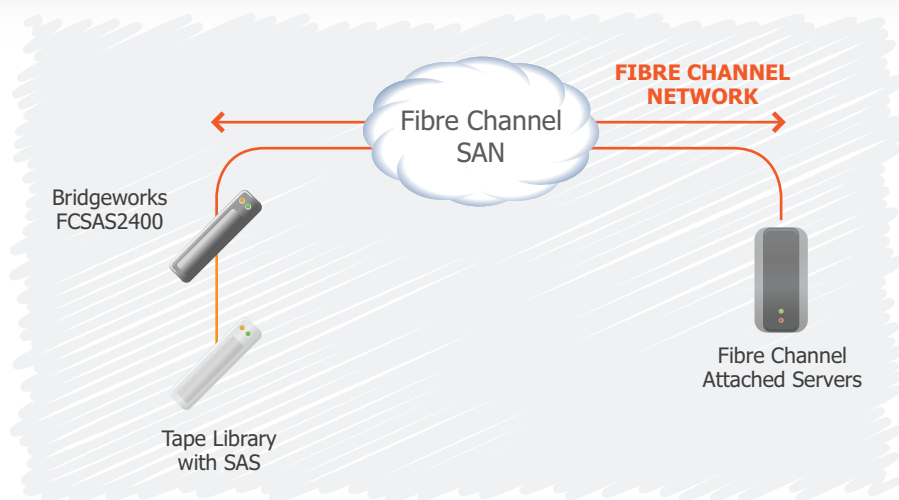

Product Features

High Performance

2 x 4Gb Fibre Channel Ports

4 x 3Gb SAS Ports

Up to 16,000 Initiators

Non-Blocking Cache

Low Power Design

Separate Management Interface

GUI Interface



Key Specifications*

Ethernet Ports

Connectivity	2 x 4Gb SFP NL_port, FL_port, F_port, N-port
Speed	Auto-sensing 1/2/4Gb/s
Maximum Block Size	1Mbyte
Maximum Initiators	16,000
Standards	FC-AL FC-PLDA FC-TAPE FC-PH FC-FLA FCP-SCSI FC-FS

SAS Ports

Connectivity	4 x 3Gb 4 way Mini-SAS
--------------	------------------------

Management Port

Connection	RJ45 10/100 BaseT
------------	-------------------

Visual Indicators

LED indicators for	Fibre Channel Link Fibre Channel Activity Ethernet Link Ethernet Activity Ethernet Speed SAS Link SAS Activity Power
--------------------	---

Physical

Enclosure Form Factor	19" 1U Rack Mount
Dimensions	L 179 mm, W 437mm, H 44 mm
Operational Temperature	0 to 40°C
Non-Operational Temperature	-20° to 60°
Power Consumption:	110-230Vac, 25-Watts approx

Global partners in

Austria
Australia
Belgium/Luxembourg
China
Denmark
Finland
France
Germany
Greece
Hong Kong
Hungary
Ireland
Italy
Japan
Netherlands
Norway
Poland
Russia/CIS
South Africa
Spain
Sweden
Switzerland
Taiwan
United Kingdom
USA

*Bridgeworks reserves the right to change the specifications without notice

Bridgeworks

135 Somerford Road
Christchurch
Dorset
BH23 3PY

Tel +44 (0)1202 588588
Fax +44 (0)1202 588589
email sales@4bridgeworks.com
Web www.4bridgeworks.com

Company Registered in England No 2155954
Registered Office: Nat West Bank Chambers
55 Station Road New Milton Hampshire BH25 6JA