




Datasheet: FS200 Fibre Channel to SCSI Bridge

Overview

The FS200 Fibre Channel to SCSI Bridge is a high performance protocol bridge for connecting SCSI enabled peripherals such as Disks, Tape Drives, Tape Libraries and Optical devices to Fibre Channel Networks.

The FS2400 is housed in an industry standard 1U 19" rack mount enclosure with integral power supplies and cooling. Connectivity to the Fibre Channel Network is via 2 auto-sensing 4Gb ports that can detect the network connection speed and to the SCSI peripheral devices via 4 Ultra 160 SCSI ports.

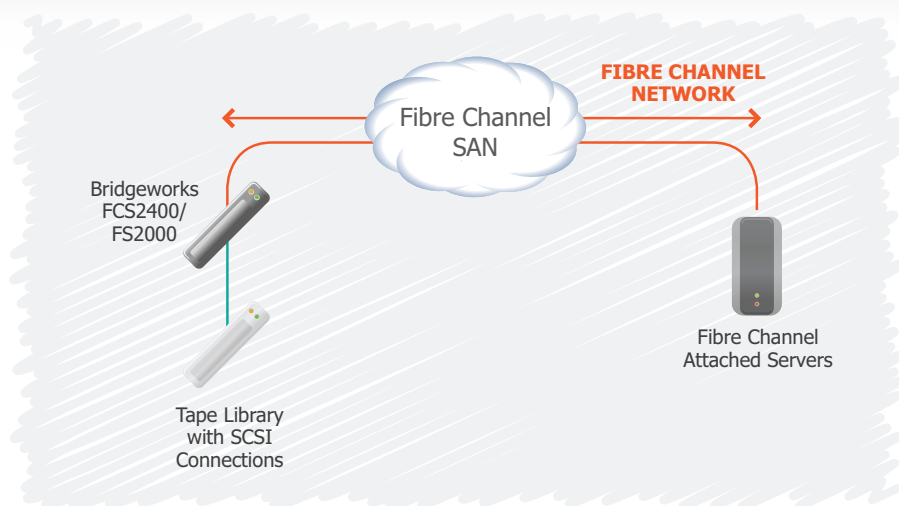

Key Advantages

Performance Has many unique features to maximise performance and ensure your data is transferred to the peripheral devices in the shortest possible time. With its unique non-blocking data cache module and patent applied modular technology, the FS200 provides industry leading performance.

Ease of Use With every increasing pressure on IT staff, there is less time to spend on learning and managing new products. Therefore, it is critical that new products are intuitive and easy to use. Bridgeworks works closely with its customers to ensure this is always the case.

Return on Investment Maximising the return on any investment has always been critical. By using the FS200 to connect existing SCSI devices to the Fibre Channel Network not only maximises your investment but also adds a new level of functionality and flexibility.

Environment The FS200 uses the latest power supply technologies with typical efficiencies of 95%, which minimise electrical power consumption and heat output.

Product Features

2Gb Fibre Channel Ports

2 x Ultra 160 SCSI Ports

Up to 16,000 Initiators

Non-Blocking Cache

Low Power Design

Separate Management Interface



Key Specifications*

Fibre Channel Ports

Connectivity	2Gb SFP NL_port, FL_port, F_port, N-port
Speed	Auto-sensing 1/2/4Gb/s
Maximum Block Size	1Mbyte
Maximum Initiators	16,000
Standards	FC-AL FC-PLDA FC-TAPE FC-PH FC-FLA FCP-SCSI FC-FS

SCSI Ports

Connectivity	2 x Ultra160 68 Way VHDL
Speed	Auto sensing N, F, W Ultra80 Ultra160

Management Port

Connection	RS232 9-way D type
------------	--------------------

Visual Indicators

LED indicators for	Power Fan Fail
--------------------	-------------------

Physical

Enclosure Form Factor	19" 1U Rack Mount
Dimensions	L 179 mm, W 437mm, H 44 mm
Operational Temperature	0 to 40°C
Non-Operational Temperature	-20° to 60°
Power Consumption:	110-230Vac, 25-Watts approx

Global partners in

Austria
 Australia
 Belgium/Luxembourg
 China
 Denmark
 Finland
 France
 Germany
 Greece
 Hong Kong
 Hungary
 Ireland
 Italy
 Japan
 Netherlands
 Norway
 Poland
 Russia/CIS
 South Africa
 Spain
 Sweden
 Switzerland
 Taiwan
 United Kingdom
 USA

*Bridgeworks reserves the right to change the specifications without notice

Bridgeworks

135 Somerford Road
 Christchurch
 Dorset
 BH23 3PY

Tel +44 (0)1202 588588
Fax +44 (0)1202 588589
email sales@4bridgeworks.com
Web www.4bridgeworks.com

Company Registered in England No 2155954
 Registered Office: Nat West Bank Chambers
 55 Station Road New Milton Hampshire BH25 6JA