



QLE7342


Dual-Port 40Gbps (QDR) InfiniBand® to PCI Express Adapter

Benefits

- High performance
- Superior scalability
- Enhanced reliability
- Protects existing server investments
- Lowest power and cooling requirements
- Environmentally friendly

Features

- 40Gbps InfiniBand interface
- 3400MBps unidirectional throughput
- 30M messages processed per second (non-coalesced)
- 1.0 microsecond latency that remains low as the fabric is scaled
- Multiple virtual lanes (VLs) for unique Quality of Service (QoS) levels per lane over the same physical port
- TrueScale™ architecture, with MSI-X interrupt handling, is optimized for multi-core compute nodes
- Operates without external memory
- Optional data scrambling in InfiniBand link
- RoHS 6 compliant
- Complies with InfiniBand Trade Association (IBTA) v1.2 standard
- Supports OpenFabrics Alliance software distributions

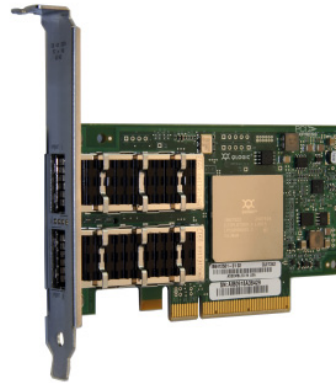

High Performance Computing (HPC) solutions have used InfiniBand networks to meet the needs of the most demanding set of applications and grand challenges. The QLE7342 is a dual-port 40Gbps InfiniBand PCI Express® Gen2 x8 adapter. It is a highly integrated design that delivers unprecedented levels of performance, making it the ideal solution for HPC applications that rely on low latency, direct memory access.

High Performance. Quad data rate (QDR) InfiniBand delivers 40Gbps per port (4×10Gbps), providing the necessary bandwidth for high-throughput applications. With the highest message rate and lowest latency of any InfiniBand adapter, the QLE7342 provides superior HPC application performance.

Superior Scalability. QLogic's TrueScale architecture is designed to deliver near linear scalability. As additional compute resources are added to a cluster, latency remains low and the message rate scales with the size of the fabric, resulting in maximum utilization of compute resources.

Enhanced Reliability. The QLE7342's advanced design does not need onboard firmware or external memory, which enhances not only its performance, but also reliability. The ASIC has ECC protection on all internal SRAMs and parity checking on all internal buses. Equally important, the stateless design is inherently more resilient to adapter and fabric failures as it minimizes its reliance on the connection state. Optional data scrambling provides a mechanism to optimize data patterns, which in turn minimizes the bit-error rate.

Investment Protection. This fourth generation product is compliant with the InfiniBand Trade Association (IBTA) version 1.2 specification, ensuring interoperability with all other IBTA compliant devices. In addition, support for the OpenFabrics community distributions ensures rapid adoption by major operating system vendors, system integrators, and independent hardware (IHV) and software (ISV) vendors.

Power Optimized. Maximum performance is delivered at the lowest power, 6.2W typical, of any QDR-capable, dual-port adapter.

Environmentally Friendly. The QLE7342 is RoHS 6 compliant as well as antimony free and halogen free.

QLE7342 Dual-Port 40Gbps (QDR) InfiniBand® to PCI Express Adapter

Host Bus Interface Specifications

Bus interface

- PCI Express Gen2 x8

Device type

- End point

Advanced interrupts

- MSI-X
- INTx

Compliance

- PCI Hot Plug Specification revision 1.0, PCI Bus Power Management Interface Specification revision 1.2
- IBTA version 1.2

InfiniBand Interfaces and Specifications

Data rate

- 40/20/10Gbps auto-negotiation

Virtual lanes

- Configurable for one, two, four, or eight VLs
 - 2KB MTU or
 - 4KB MTU (single InfiniBand port)

MTU

- All standard InfiniBand MTUs including 4KB

Interfaces

- Supports quad small form factor pluggable (QSFP) optical and copper cable specifications; CX4/microGigaCN specifications

Physical Specifications

Ports

- Two QDR 4X InfiniBand

PCI Express Card

- Low profile (4.83 in × 2.71in)

- Brackets
 - Standard bracket: 1.84 cm × 12.08 cm (.73 in × 4.76 in)
 - Low profile bracket: 1.84 cm × 8.01 cm (.73 in × 3.15 in)

- Link status LED indicators

Environment and Equipment Specifications

Power consumption

- Typical 6.2W

Temperature

- Operating: 10 to 55° C (estimated)
- Storage: -40 to 70° C (estimated)

Humidity

- 10% to 95% (operating, non-condensing) (estimated)
- 5% to 100% (non-operating, non-condensing) (estimated)

Heatsink

- None

RoHS Compliance

- RoHS 6 and green packaging (antimony free and halogen free)

Agency Approvals—EMI and EMC

US/Canada

- FCC Part 15, Subpart B, Class A; ICES-003, Class A

Europe

- EN55022:1994+A1+A2; EN55024:1998+A1+A2; EN61000-3-2:2000 (Harmonic Current); EN61000-3-3:1995+A1 (Voltage Fluctuation & Flicker)

Japan

- VCCI V-3/2004.4, Class A

New Zealand/Australia

- AN/NZS CISPR 22:2002, Class A

Korea

- MIC (KN22, KN24), Class A

Taiwan

- BSMI (CSN 13438), Class A

Agency Approvals—Safety

US/Canada

- UL; CSA/UL 60590-1; CB Scheme: IEC 60950-1

Europe

- TUV: EN60950:2001+A11

Tools and Utilities

Host driver/upper level protocol (ULP) support

- OpenFabrics Alliance
- QLogic SRP
- QLogic VNIC
- Performance scaled messaging (PSM) MPI acceleration stack
- SHMEM
- FastFabric™ tools

MPI support

- MVAPICH2, MPICH2, Open MPI, QLogic MPI, HP-MPI, Platform (Scal) MPI, Intel MPI

Operating systems

- Red Hat®
- SUSE®
- CentOS
- Scientific Linux®

Ordering Information

QLE7342-CK

- Ships in an individually packed box with a standard size bracket, a spare low-profile bracket, and Quick Start Guide



Corporate Headquarters QLogic Corporation 26650 Aliso Viejo Parkway Aliso Viejo, CA 92656 949.389.6000 www.qlogic.com
 Europe Headquarters QLogic (UK) LTD. Quatro House Lyon Way, Frimley Camberley Surrey, GU16 7ER UK +44 (0) 1276 804 670

© 2009, 2010 QLogic Corporation. Specifications are subject to change without notice. All rights reserved worldwide. QLogic, the QLogic logo, FastFabric, and TrueScale are trademarks or registered trademarks of QLogic Corporation. InfiniBand is a registered trademark and service mark of the InfiniBand Trade Association. PCI Express is a registered trademark of PCI-SIG Corporation. Intel is a registered trademark of Intel Corporation. AMD Opteron is a trademark of Advanced Micro Devices, Inc. Red Hat is a registered trademark of Red Hat, Inc. SUSE is a registered trademark of Novell, Inc. Linux is a registered trademark of Linus Torvalds. All other brand and product names are trademarks or registered trademarks of their respective owners. Information supplied by QLogic Corporation is believed to be accurate and reliable. QLogic Corporation assumes no responsibility for any errors in this brochure. QLogic Corporation reserves the right, without notice, to make changes in product design or specifications.