

Satellite IP

Using IP to Transport SS7 over Satellite

VON Europe 2006

Characteristics of Satellite Communications

- ◆ At 23,000 miles above the Earth...
 - ◆ Signals take around 270 milliseconds from ground to space to ground again
 - ◆ Round trip time (RTT) is twice as much, along with processing delay – typically 600 ms
 - ◆ More prone to transmission errors
 - ◆ Impacts message acknowledgement, hence stream reliability

SS7 over Satellite?

- ◆ SS7 over satellite uses fixed bandwidth (64 kbits)
- ◆ Typically low utilization links to get to remote areas
 - ◆ Less efficient usage of the circuit
- ◆ Uses older technology typically resulting in higher error rates
 - ◆ Links are more prone to “bouncing,” especially in bad weather conditions
 - ◆ Subscribers affected by momentary loss of service
- ◆ PCR helps with reliability, but far from perfect

IP over Satellite?

- ◆ Mostly newer technology

- ◆ Better error rates, better error recovery algorithms
- ◆ Resulting in better reliability

- ◆ However...

- ◆ TCP/IP was designed for reliable networks
- ◆ TCP/IP has a flexible window acknowledgement scheme, but...
- ◆ Retransmission algorithms are fixed, and ill suited for high latency networks with high error rates

How to put SS7 over IP

◆ UDP

- ◆ No message acknowledgement, no message sequencing
- ◆ Not reliable

◆ TCP

- ◆ Reliable, but prone to head-of-line blocking
- ◆ Not configurable
- ◆ No redundancy

◆ SCTP (SIGTRAN) was designed for signaling over IP

SIGTRAN

- ◆ SIGTRAN Workgroup

- ◆ Part of the IETF, define a set of protocols for signaling transport (mostly SS7 today) over IP
- ◆ Mandate: ensure reliability similar to circuit-based SS7 of today, but over IP networks


- ◆ Transport:

- ◆ SCTP (RFC 2960, 3306) has been a standard for more than four years

- ◆ Applications:

- ◆ Specifically tailored to the signaling layers - M3UA, M2UA, M2PA, SUA, IUA, etc. - use SCTP as a transport layer

What Does SCTP Offer?

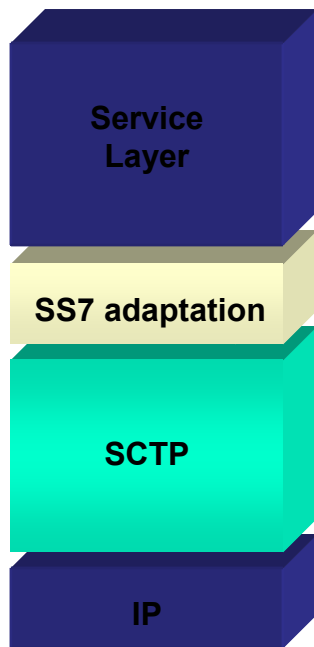

- ◆ Acknowledged, error-free transfer of signaling messages
- ◆ Network level fault tolerance through support of multiple IP connections (multi-homing)
- ◆ Sequenced delivery of user messages over multiple streams
- ◆ Security (resistance to IP attacks)
- ◆ Performance optimized for signaling messages

Configuring SCTP

- ◆ Retransmit timeout (RTO) – init, min, max
 - ◆ Allows to specify when to retransmit unacknowledged messages
 - ◆ Can be set higher than RTT for highest efficiency...
 - ◆ Or can be set lower than RTT for “PCR” like retransmission in high error rate deployments
- ◆ Number of retransmissions
 - ◆ Can be tailored to be very persistent
- ◆ Other parameters: initial congestion window, etc...

SS7: circuit or packet over Satellite?

Circuit

- ◆ Retransmission using preventative cyclical redundancy (PCR)
- ◆ Constantly retransmit messages until acknowledged
- ◆ “Fastest” way to get MSU to destination
- ◆ Most costly, bandwidth
- ◆ Link stability vulnerable to errors, still with stringent timers.



Packet

- ◆ SCTP retransmission “on demand” as acknowledgements timeout
- ◆ Sophisticated timeout retransmission algorithm, based on RTT
- ◆ Slower to get MSU to destination (sometimes)
- ◆ Less costly
- ◆ Link stability less vulnerable to errors, with SS7 MSU acknowledgement emulation


Benefits of SS7 over IP for Satellite

- ◆ For most applications, less bandwidth utilization
- ◆ Can share bandwidth with other applications (QoS recommended)
- ◆ More reliable than SS7 over Satellite with PCR
- ◆ More configurable than traditional deployments
- ◆ Lower operating costs
- ◆ Readily available

SS7 over IP Tunneling Example

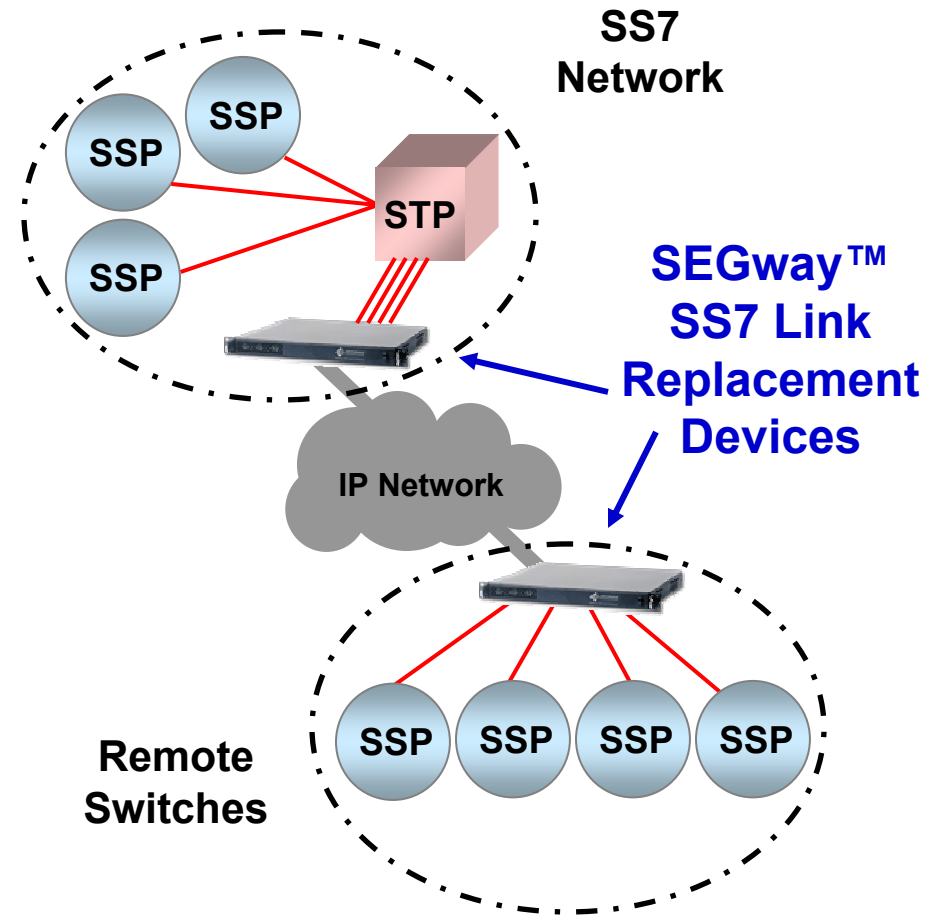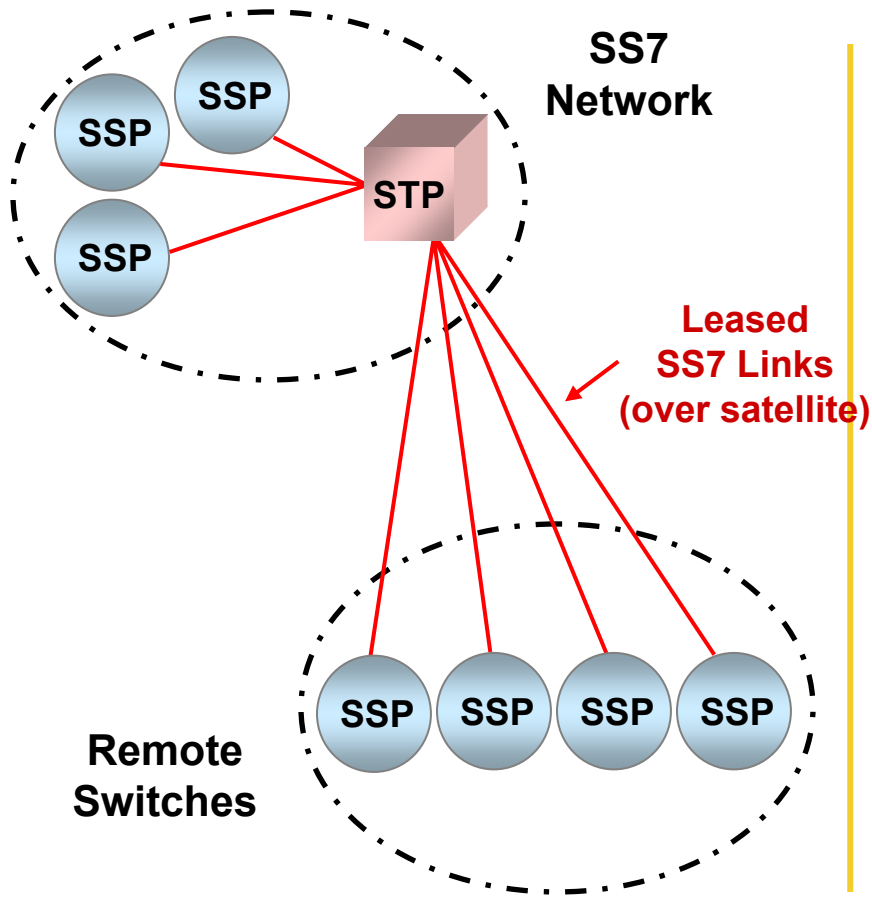


SS7 over IP: Link Replacement

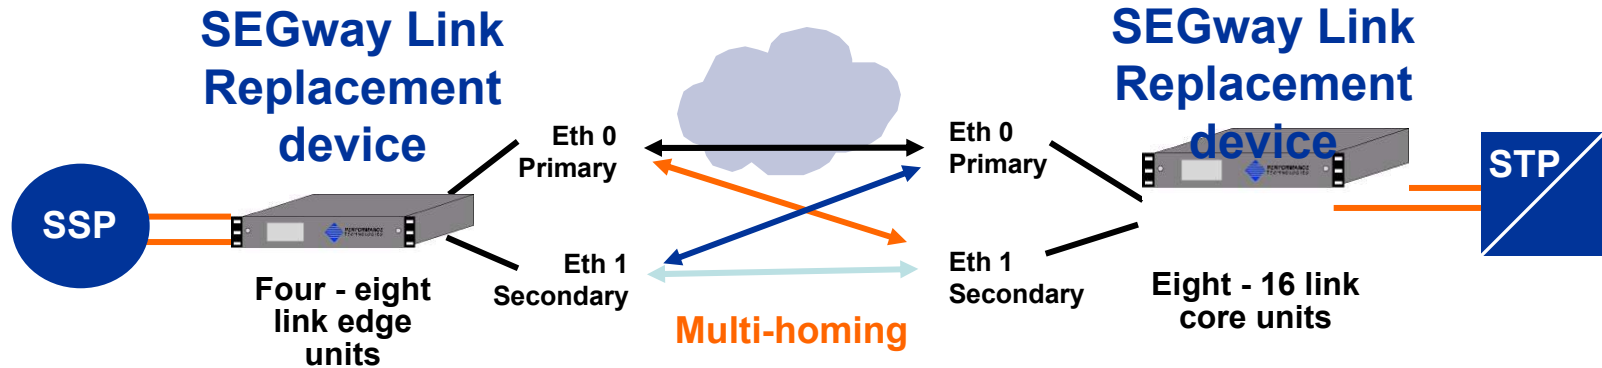


- ◆ Transparent solution requires no point code
- ◆ Solution has been deployed for more than four years
- ◆ More than 200 installations worldwide
- ◆ Landline, satellite and microwave link implementations


Link Replacement Is Transparent to the Network

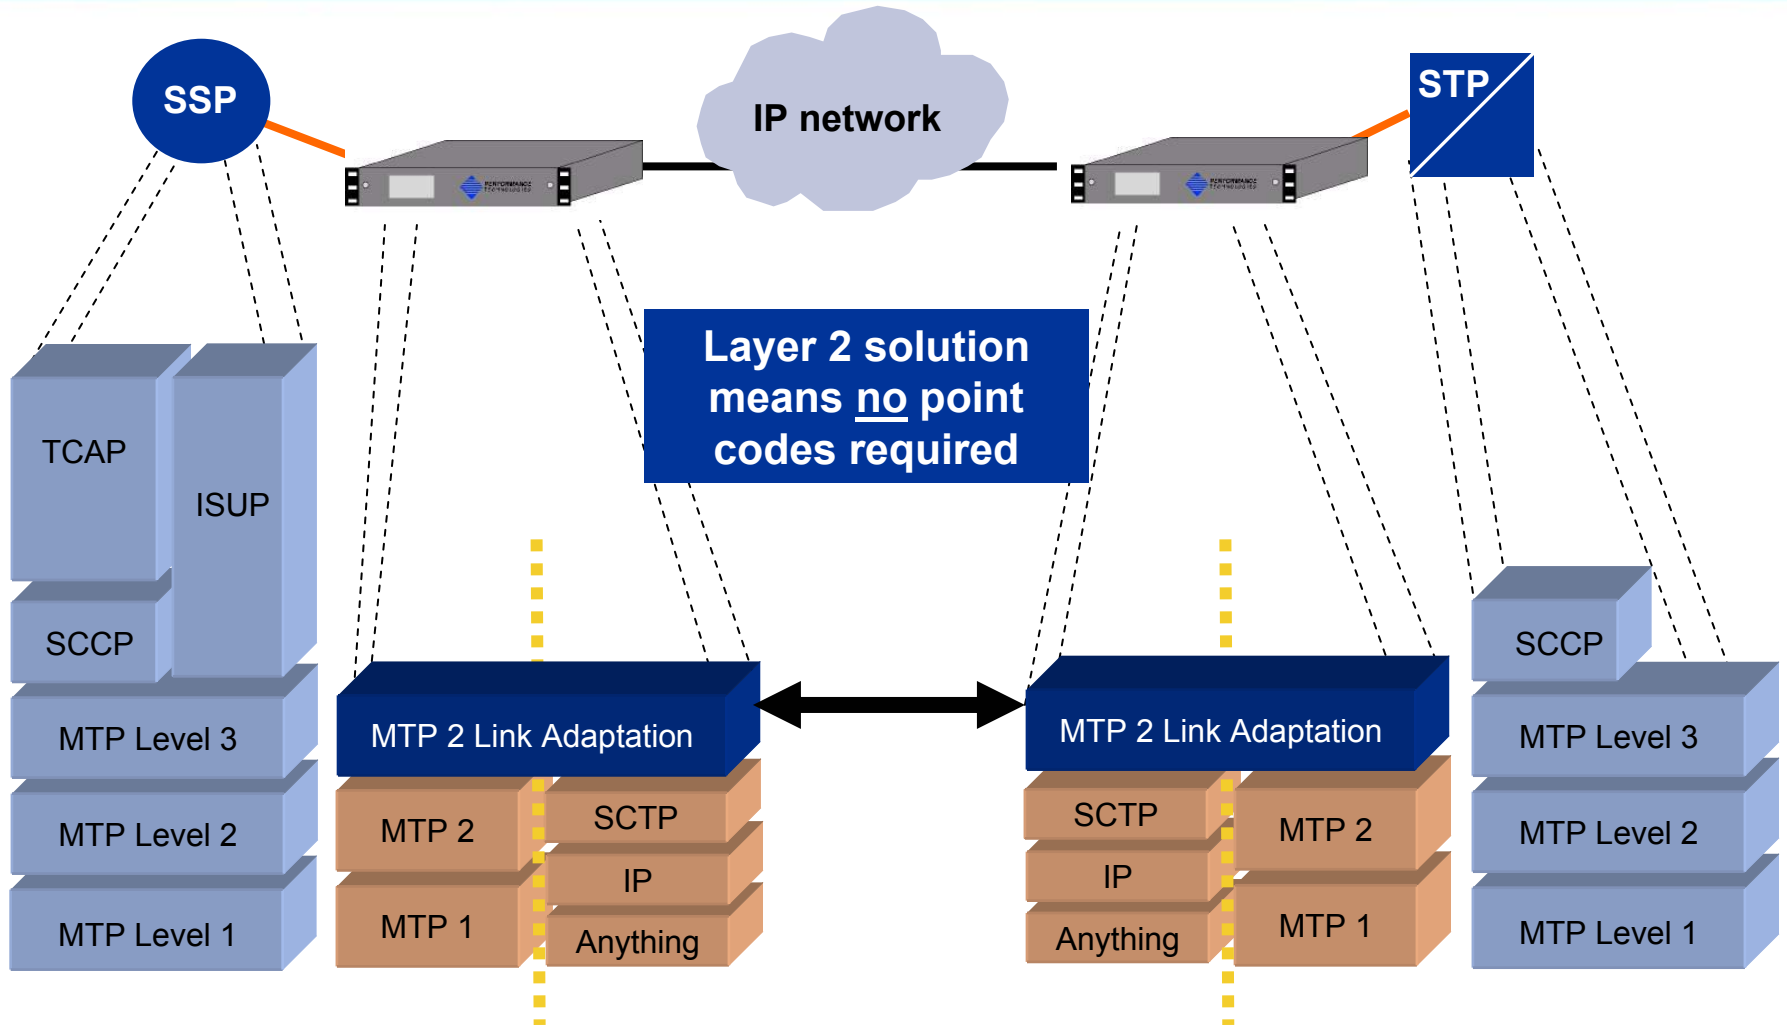

M2PA over Satellite: Requires Point Code

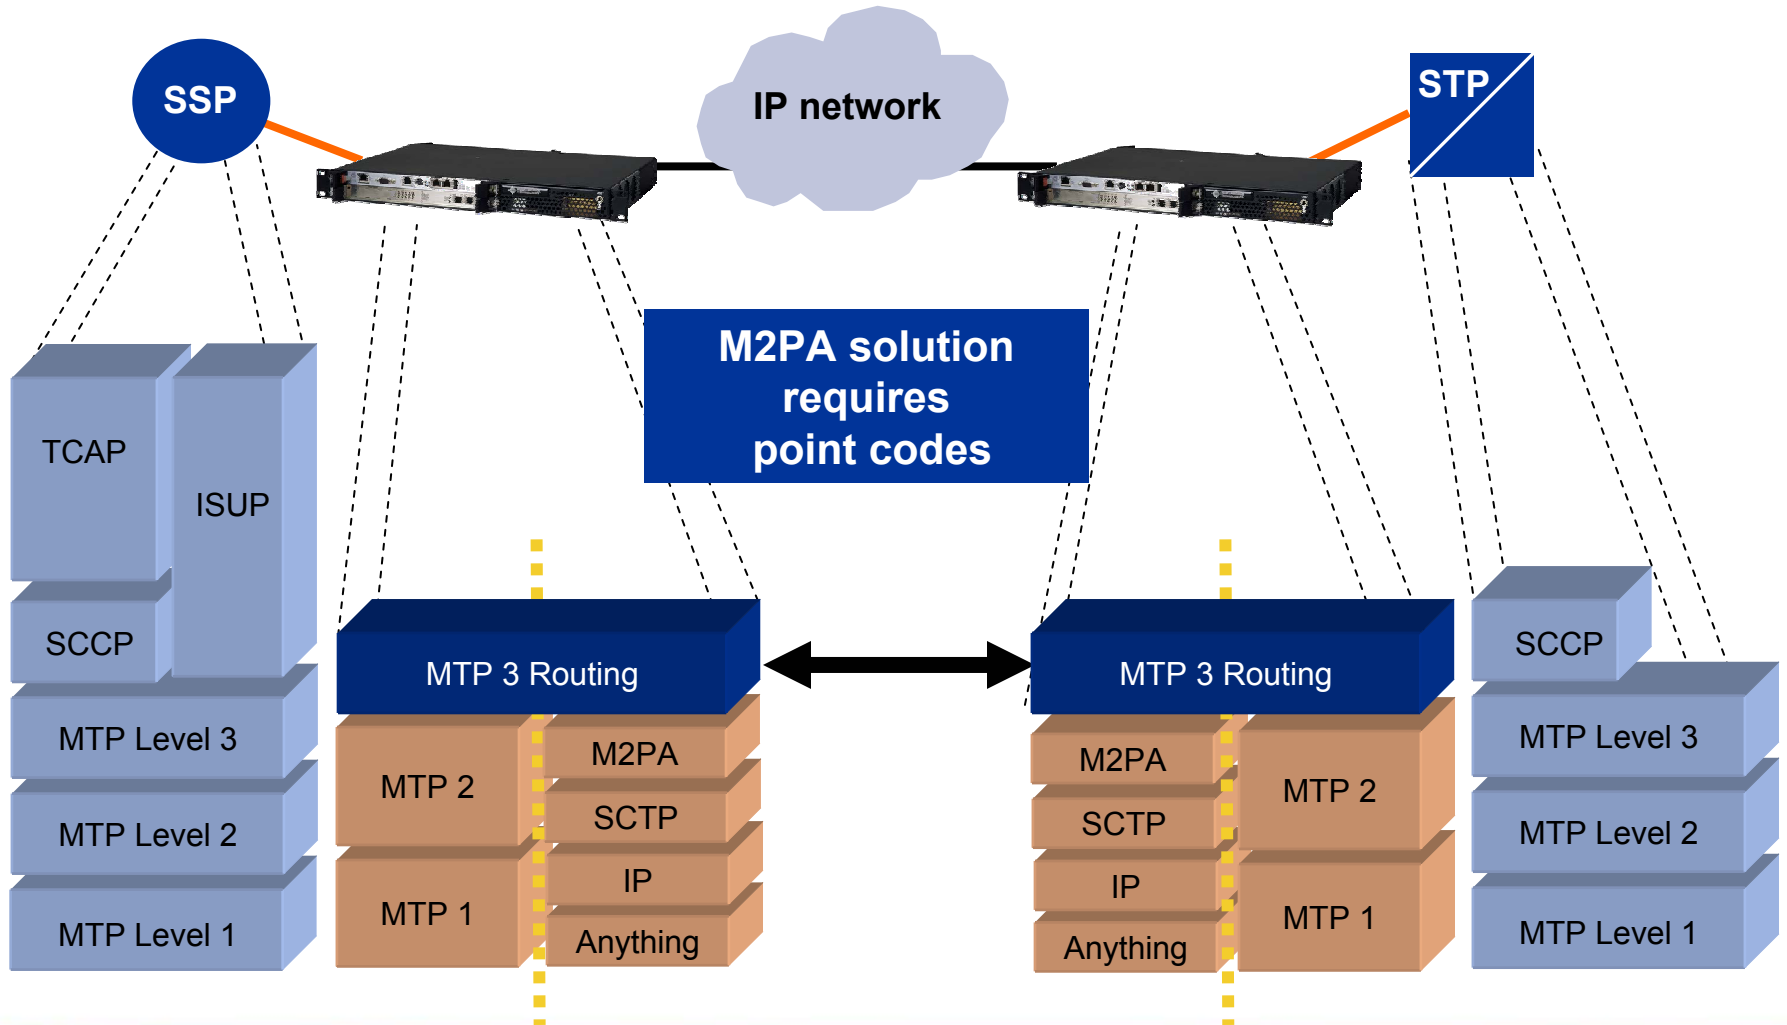

M2PA enabled STP

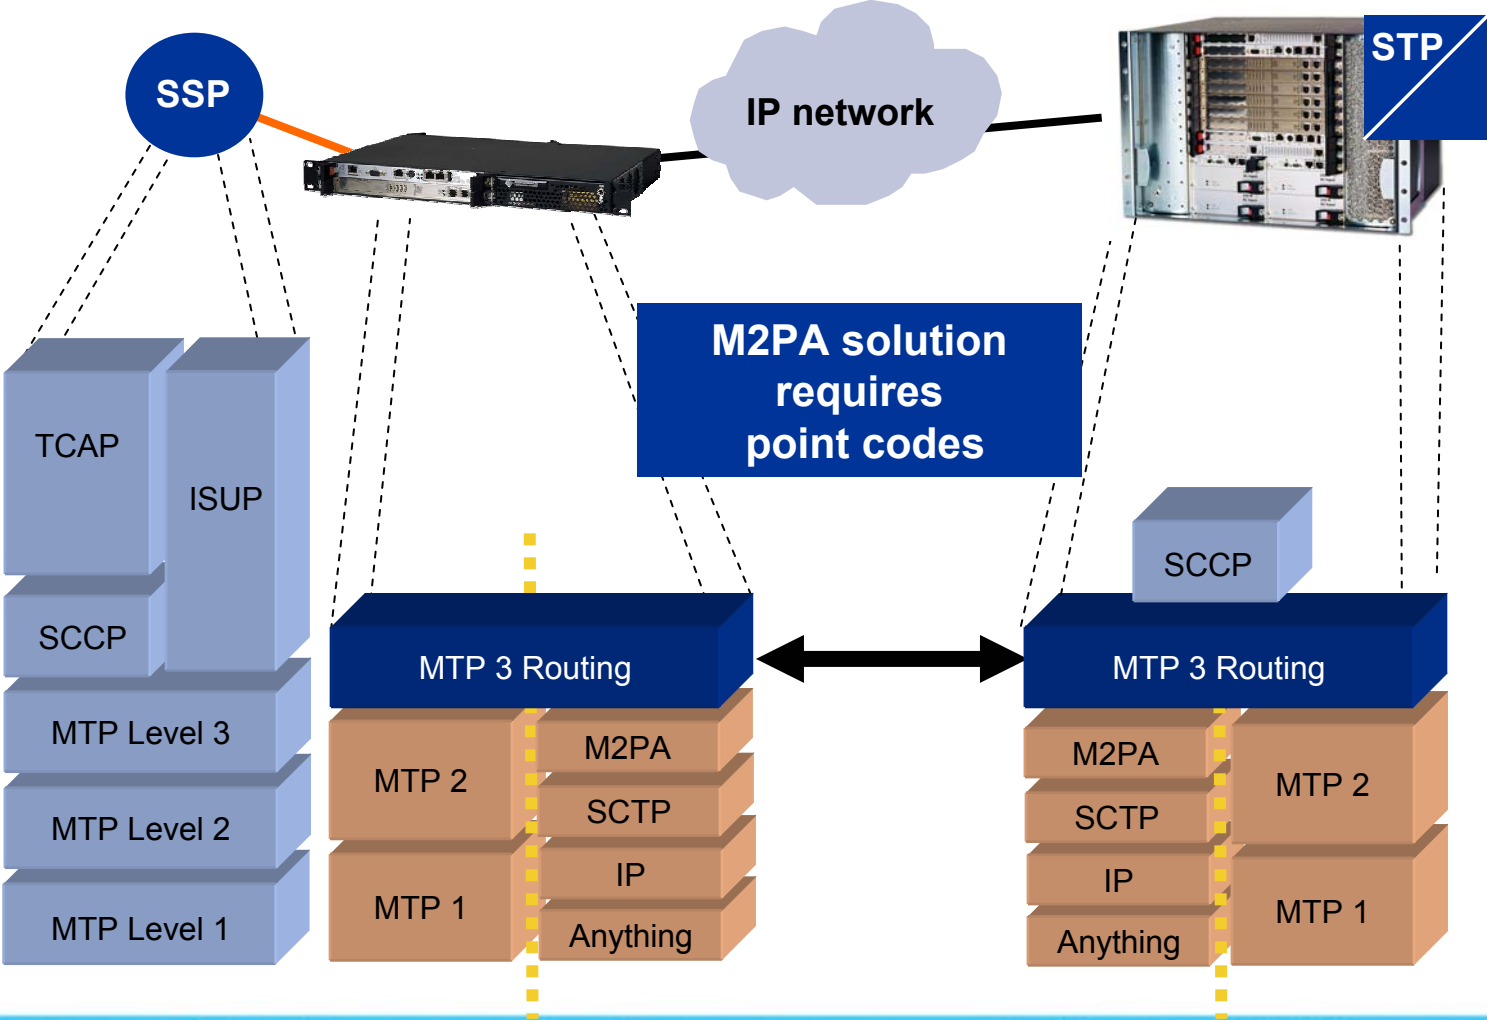

Is SCTP suited for SS7/IP/Satellite?

- ◆ SCTP offers a compromise between fast retransmission and IP congestion prevention
 - ◆ On land, packet loss is mostly due to congested routers
 - ◆ On satellite, packet loss is mostly due to errors
- ◆ Our findings:
 - ◆ IP satellites are generally more reliable
 - ◆ With more “relaxed” timers, SCTP offers stability of SS7 links over fast retransmission
 - ◆ For typical low-usage links, SCTP offers lower bandwidth utilization

Case Study: Geolink

- ◆ Geolink provides GSM service to boats, installing picocells on boats traveling in international waters
- ◆ Uses satellite communication to reach the on-land MSC, VLR, HLR, etc.
- ◆ Initially used circuits to carry voice and signaling over satellite
- ◆ Switched to packet, using Performance Technologies' SEGway 1200, and greatly increased reliability of network, while lowering operational costs.

Thank you!

Normand Glaude

VP Engineering
Signaling Systems

n glaude@pt.com